


ALL things with PURPOSE Patterns



Printing Instructions:

1. Save file to computer
2. Select to print "Actual Size"
3. Be sure "Fit to Page" is not selected
4. Be sure to print the correct orientation: "landscape"
5. Once printed, measure the box above to be sure you printed the correct size. If the box does not measure 1 inch high and 1 inch wide, go back and check your printer settings.





AMERICAN GIRL DOLL PAJAMAS AND SLIPPERS

TOP:



1. Cut out the pattern pieces
2. Take 1 PJ front and PJ back pieces and with right sides together, sew shoulder seams.
3. Take second PJ front piece and with right sides together sew across the neck line.
4. Turn right side out and stitch in the ditch across the neckline.
5. Sew back neck/collar under.
6. With right sides together, attach sleeves to bodice at the shoulder.
7. With right sides together, sew side seams.
8. Turn sleeve cuff under and sew.
9. Turn under bottom of shirt and sew.
10. Sew the rough side of 1/2" Velcro to the outside left along the length of the opening.
11. Turn the right opening under and sew the soft Velcro side to the inside of the shirt.



Pants:

1. Mark the front crotch of the pant pieces with either a pin or disappearing ink.
2. With the right sides together, sew the crotch seam.
3. With the right sides together, sew inseam.
4. With the right sides together, sew outside pant seam.
5. Turn pant cuffs under and sew.
6. *Turn waist under roughly 1/2" and sew leaving an opening for the elastic to be fed through (optional).
7. Feed thin (1/4" wide or smaller) elastic through. Sew elastic to create a circle.
8. Sew the opening left in the waist.

*Elastic is optional with this pattern. It is up to you if you prefer the look. Pants will stay on with out it.

***Pattern includes 1/4" seam allowance**

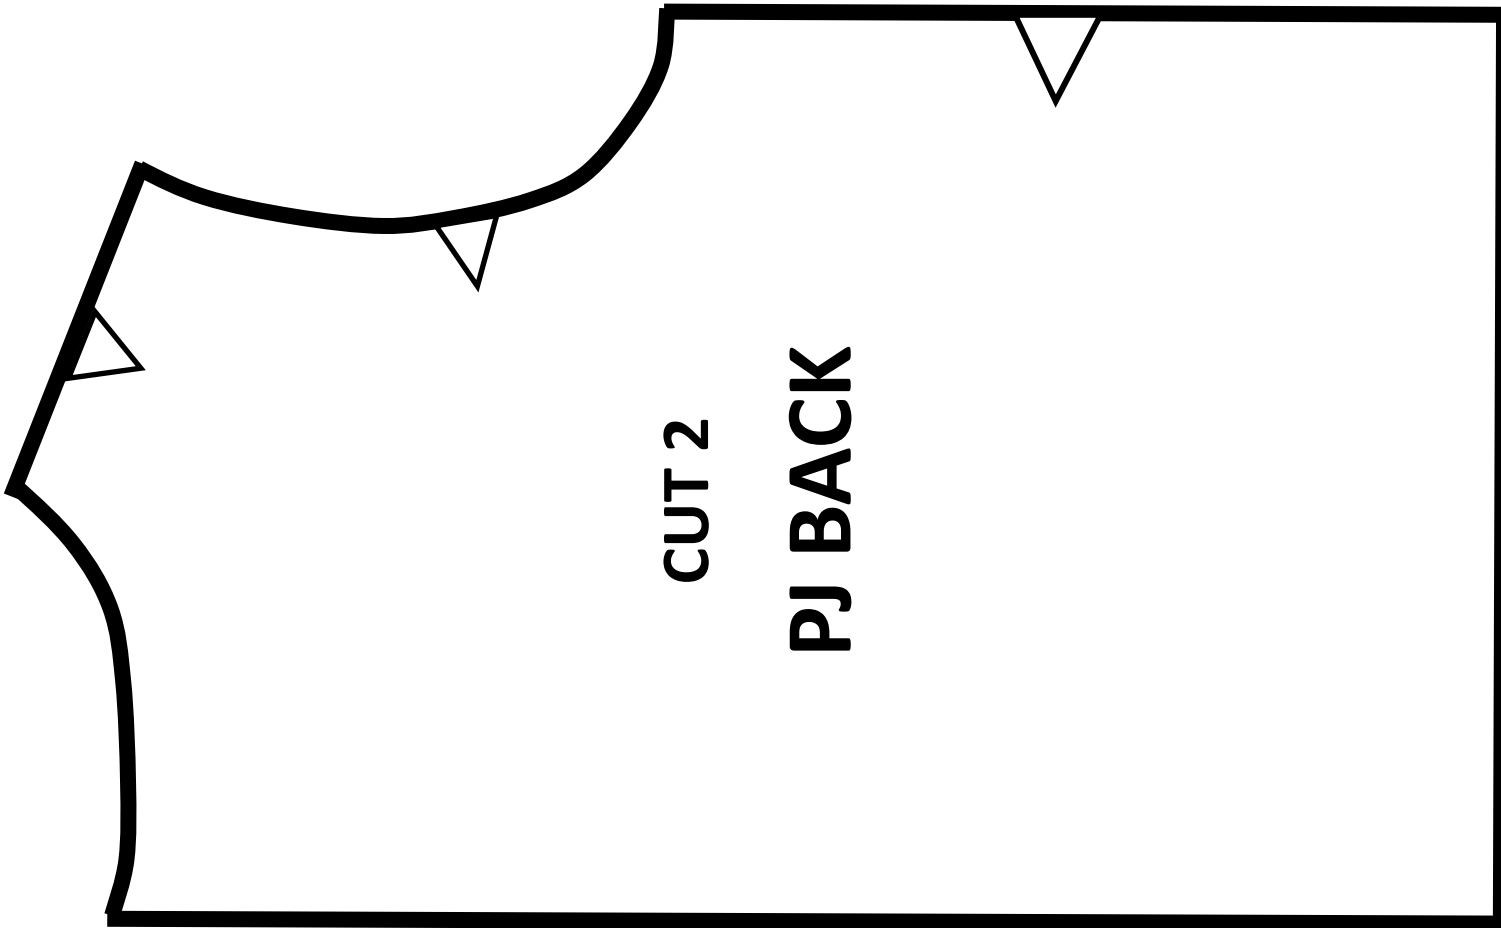

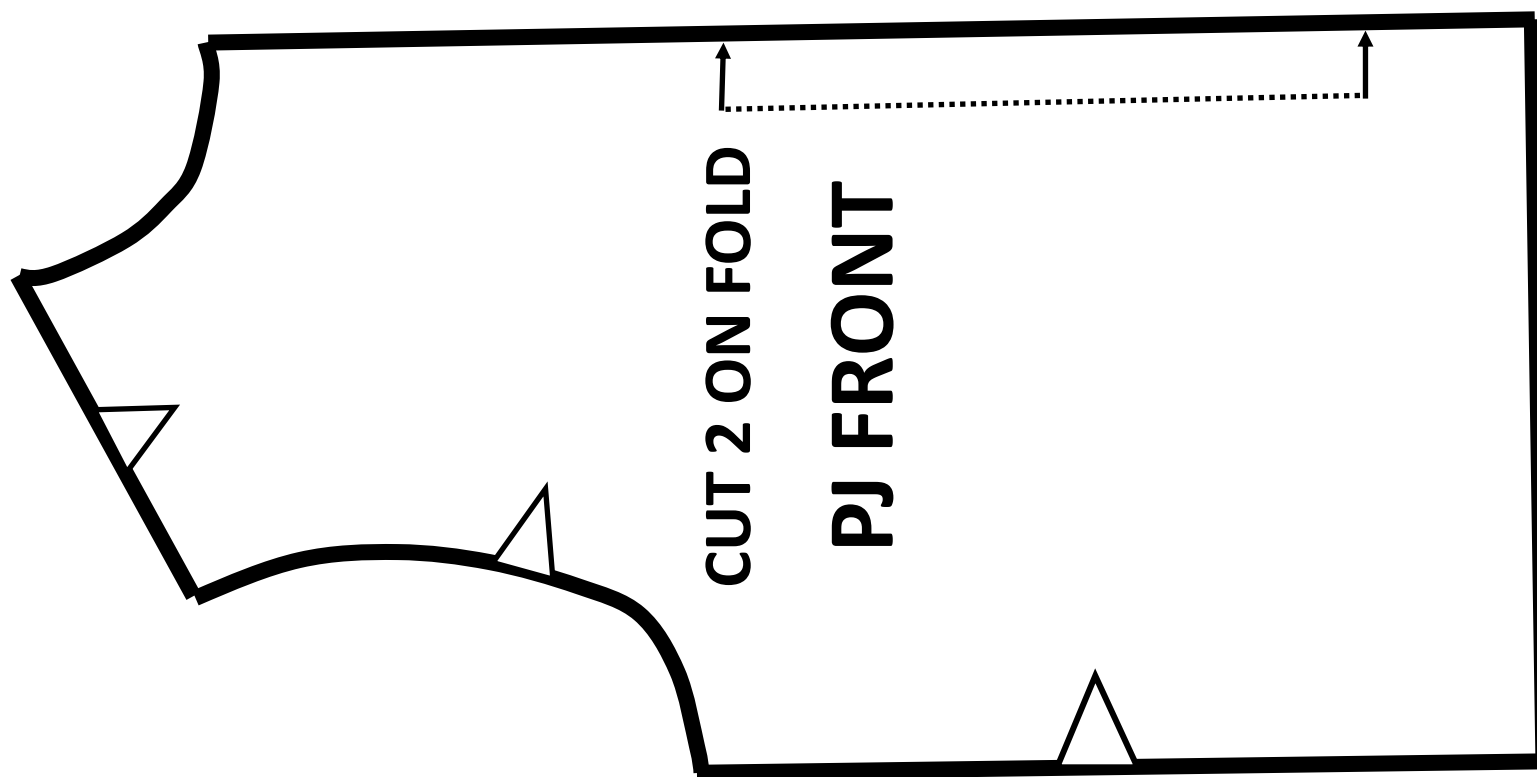


**1. CUT OUT PATTERN
B.1 AND B.2 TAPE
TOGETHER**


**2. TAPE TOGETHER
FRONT AND BACK
PANT LEGS**




**3. PLACE PATTERN ON
FABRIC AND CUT 2
LEGS**

**PANT LEG
FRONT**


B.1




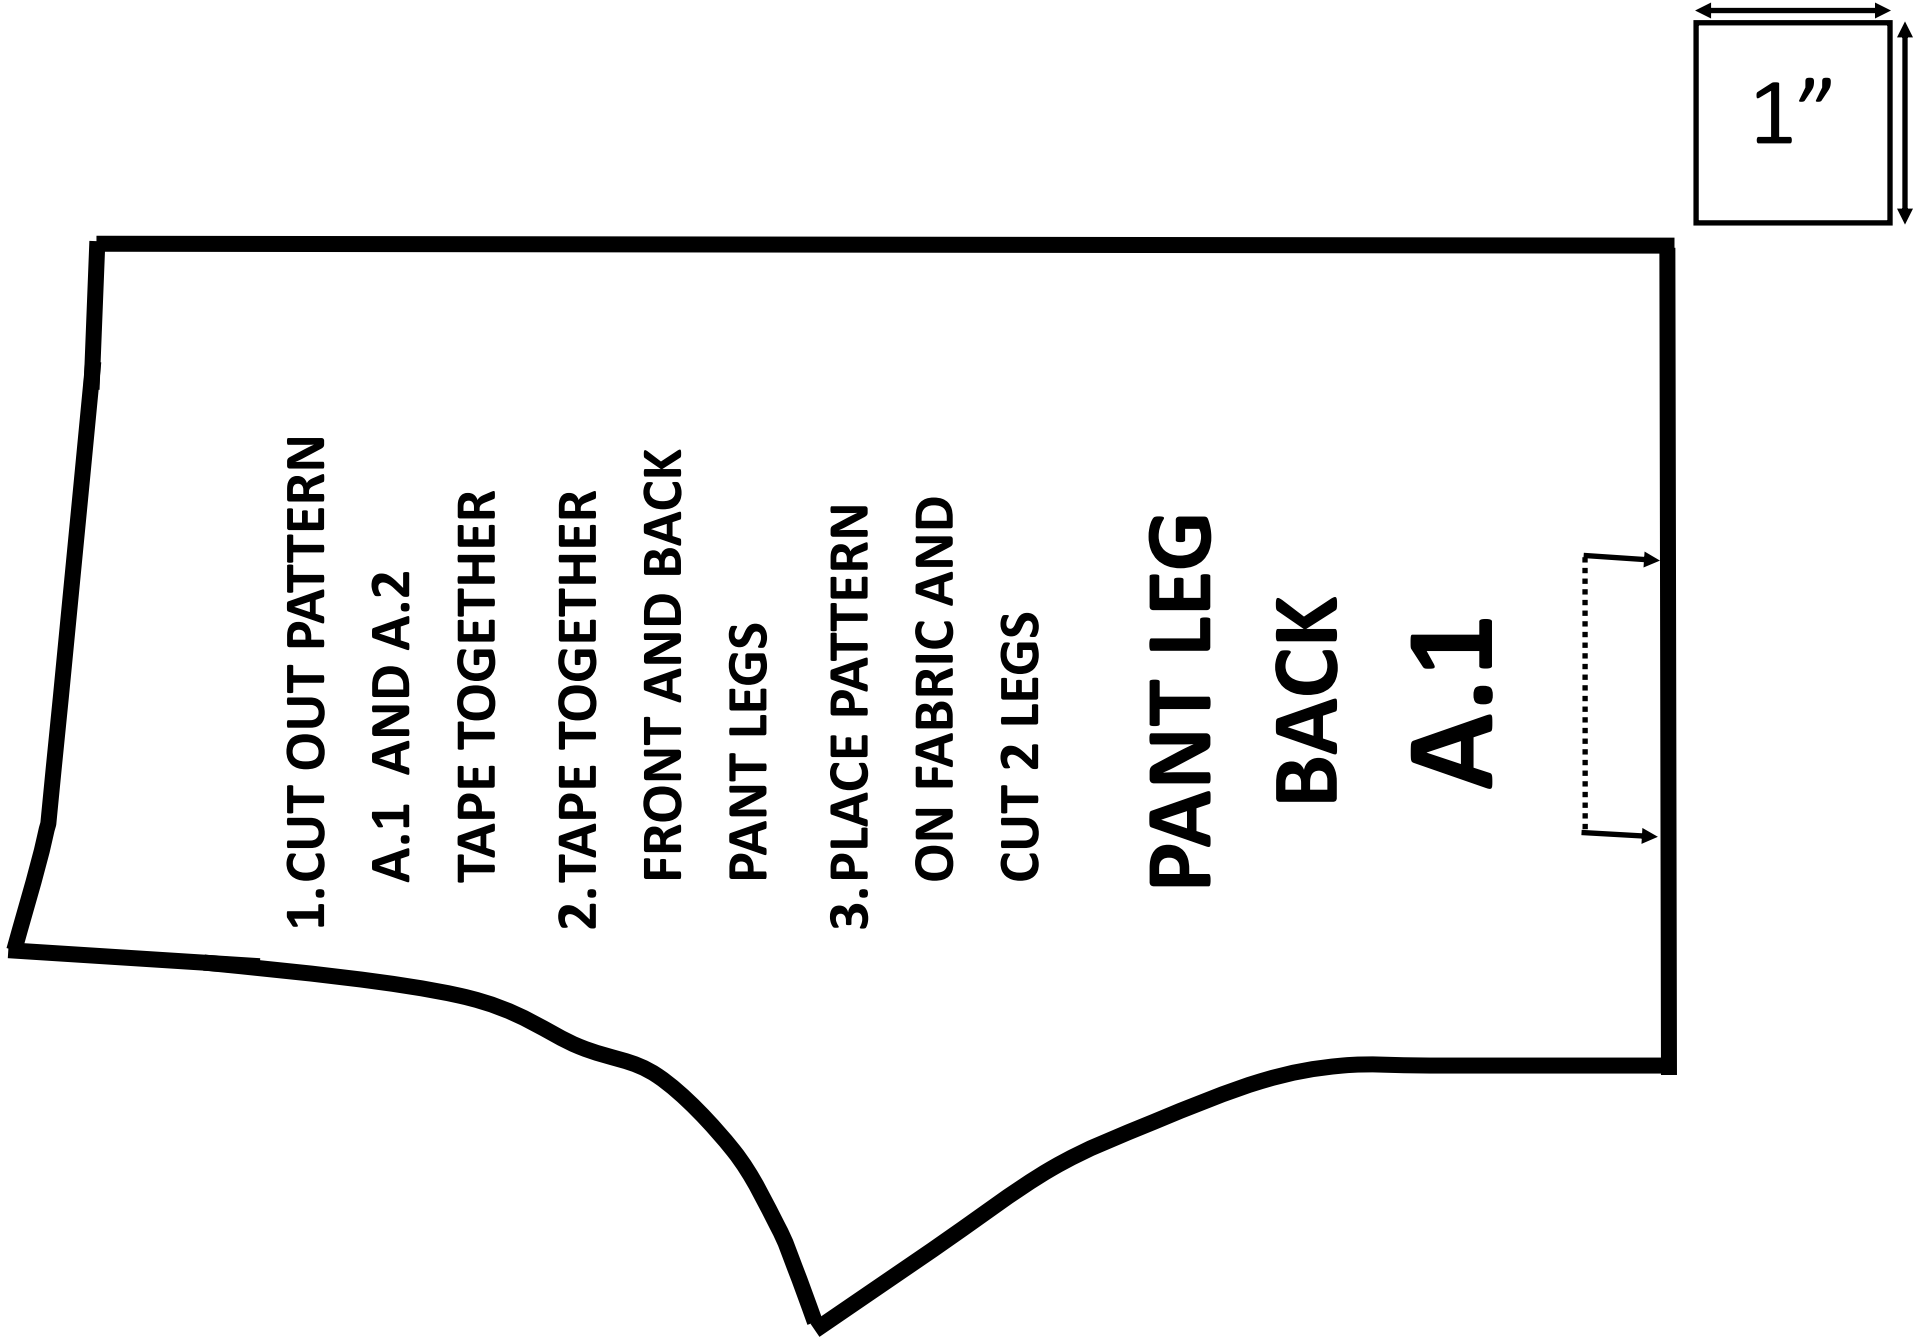

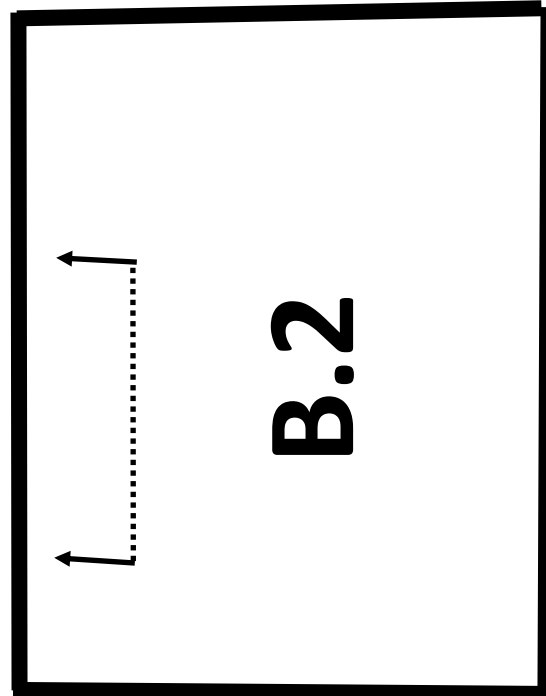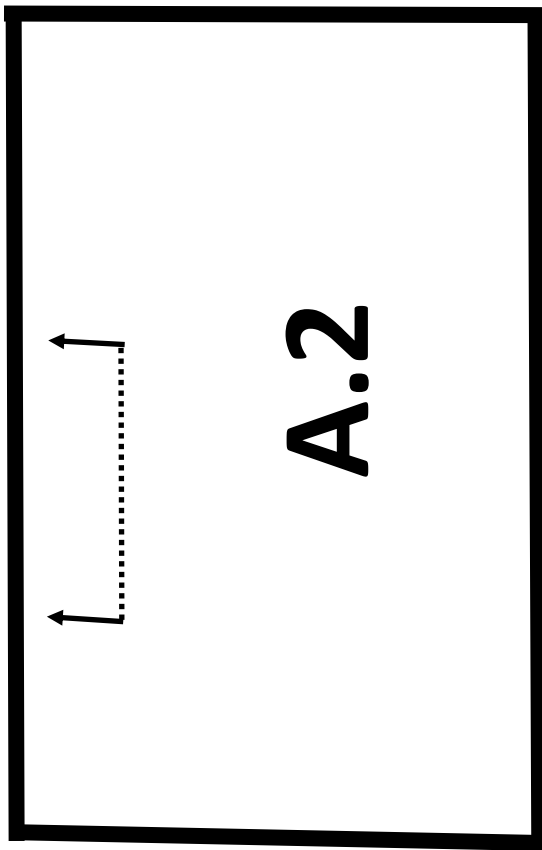


Sample of one pant leg taped together

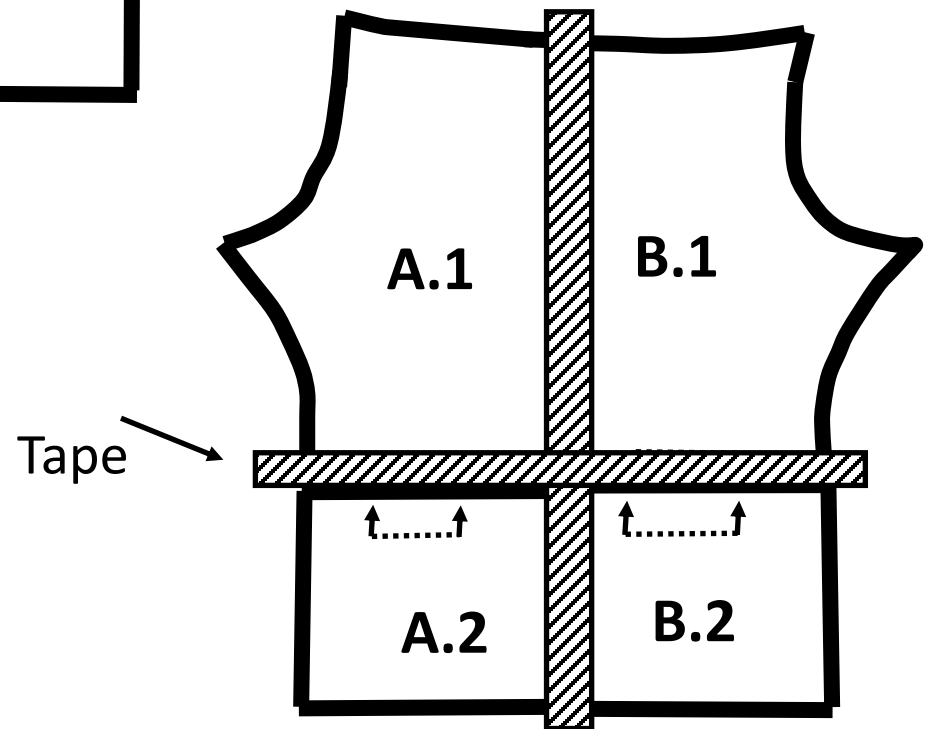

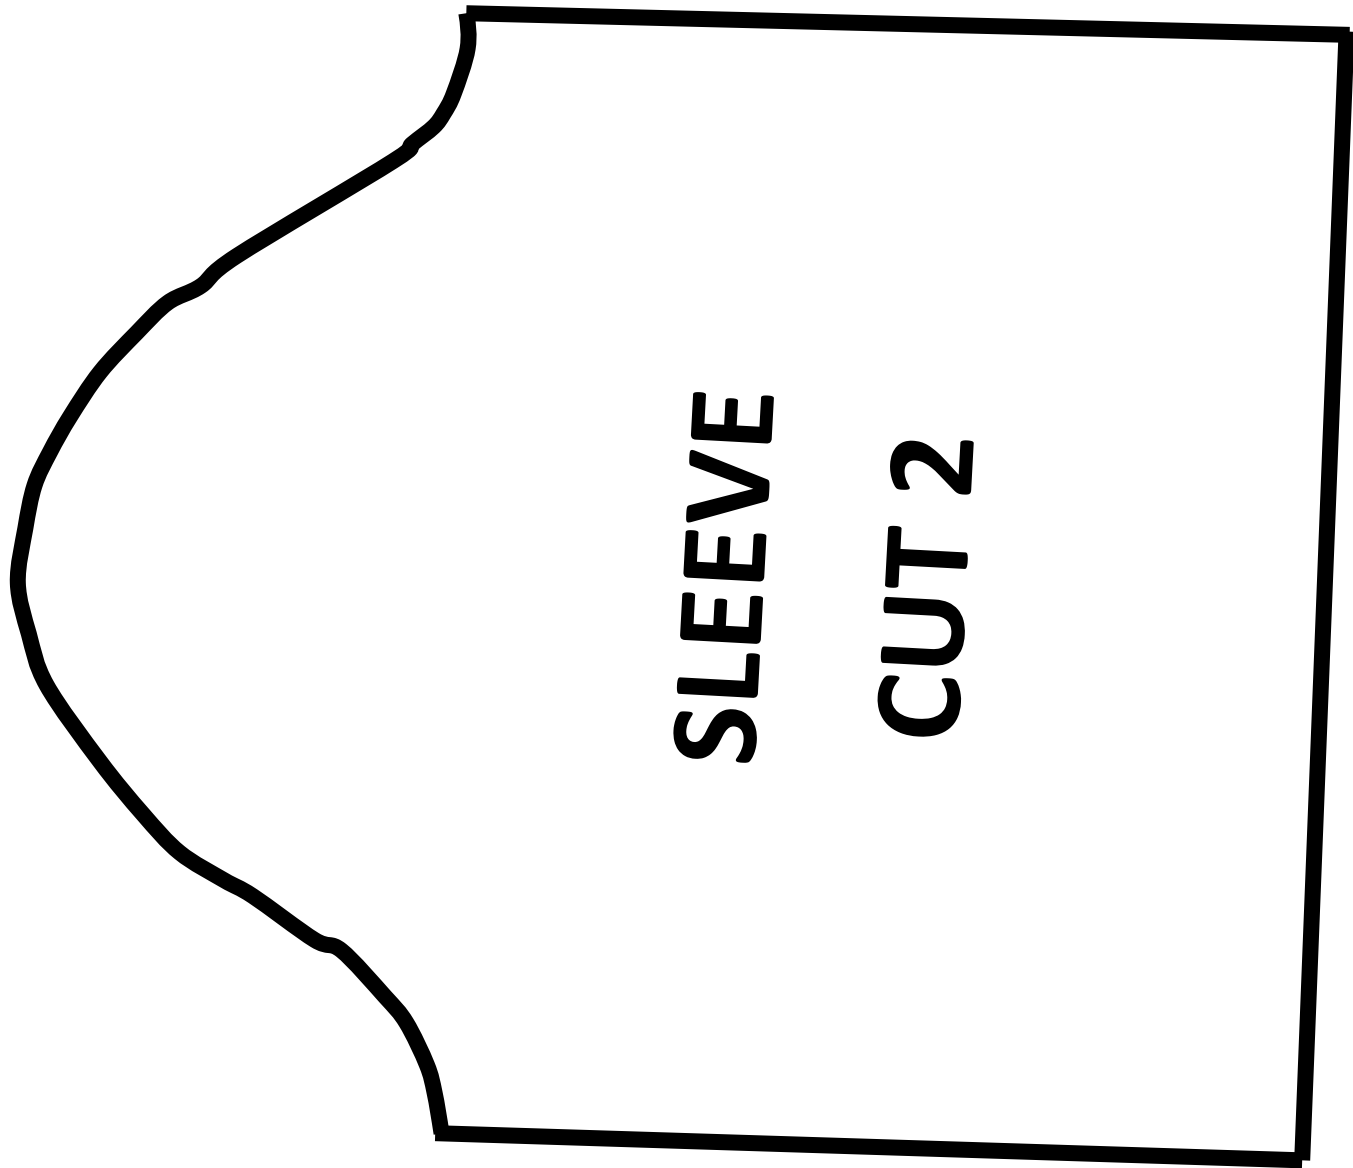

SLEEVE
CUT 2



1''

Slippers:

1. For one slipper: take one top piece and with the right sides together, sew the straight "back" edges together creating a circle. Do this same thing using a second top piece.
2. Now, take one of those top pieces and turn it inside-out. Fit the inside-out piece over the right side out piece so the two are matched up, right sides together. Pin in place and sew along the inner edge. Press that seam.
3. Open the seam. Press. Clip curves and stitch in the ditch (optional). Turn right side out. Press.
4. Match two soles up, right sides out. *Optional:* Cut a sole pad to put in between these two sole pieces for added cushion.
5. Pin the shoe top to the sole. Sew.
6. Trim the edges of any access fabric to lessen bulk.
7. Turn the shoe right side out.
8. Repeat all steps for second shoe.

Optional: Glue or stitch foam sole pads on the bottom of shoes for a finished look. This is great when using pattern for a shoe. For PJ slippers or ballet slippers you won't want a sole pad.

For ballet slippers: Sew ribbon into the seam of back edges.

